


ISOMAX 250 - 1480

TECHNICAL DATASHEET

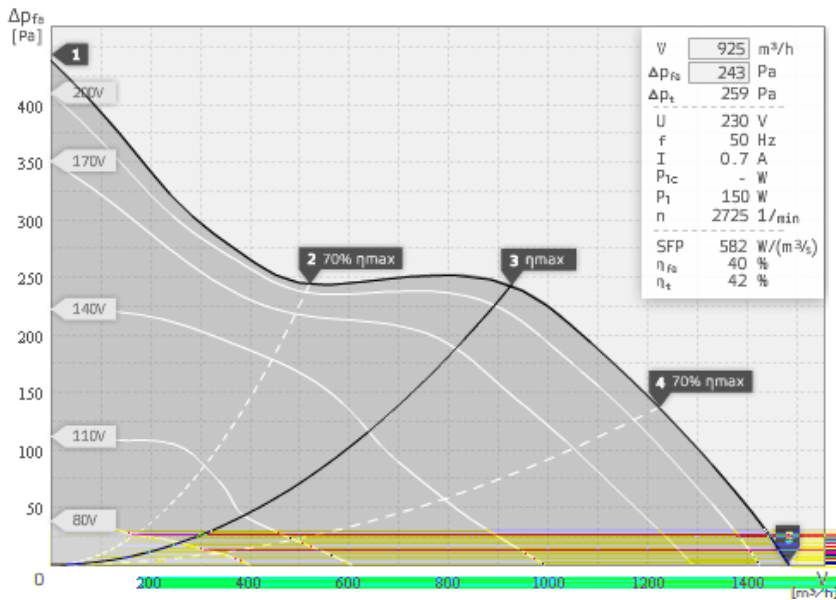

- ETALINE sound insulated
- Galvanized metal housing
- Speed controllable
- Integrated thermal switch
- With mounting brackets for hanging

Operating Point		1	2	3	4	5
Current I	A	0,7	0,6	0,7	0,7	0,7
Power Consumption P1	W	147	121	150	158	152
RPM n	1/min	2742	2813	2726	2712	2736
SPL inlet LWA5	dB(A)	69	70	66	67	70
SPL outlet LWA6	dB(A)	70	69	67	69	72
SPL casing break out LWA2	dB(A)	56	55	52	53	55

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	66	32	49	62	60	57	57	55	48
Outlet	LWA6	67	32	49	61	62	63	59	51	41
Casing	LWA2	52	43	42	42	45	45	45	41	30

ELIX 250 E2 01 121197	
Voltage UN	230 V 1~
Current Imax	0,9
Ambient Temperature tA	50 °C
Medium Temperature tM	50 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	9,9 kg

