


RK 125 L

TECHNICAL DATASHEET

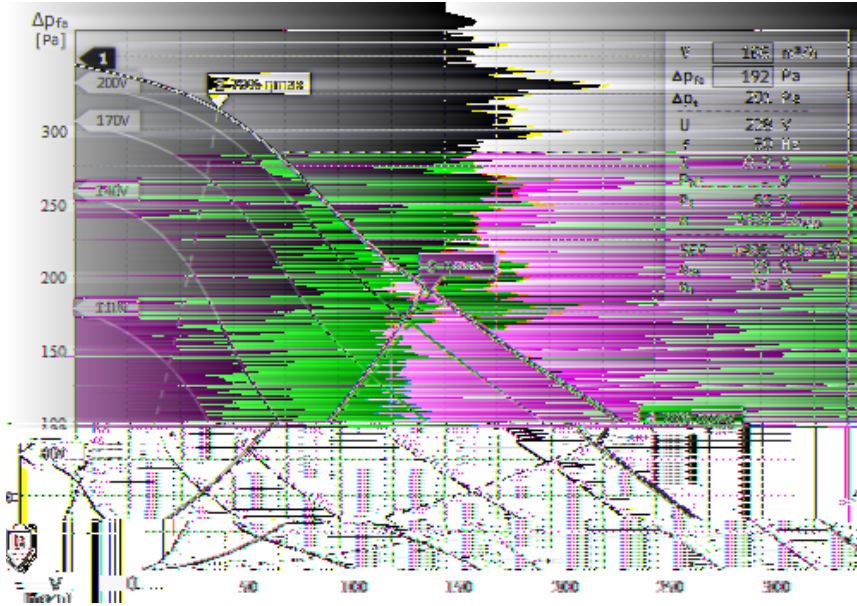

- Backward curved centrifugal fan
- Plastic housing PA6, RAL 7035
- Speed controllable
- Integrated thermal switch
- Incl. terminal box

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power Consumption P1	W	61	61	65	68	68
RPM n	1/min	2734	2686	2432	2313	2316
SPL inlet LWA5	dB(A)	-	-	-	-	-
SPL outlet LWA6	dB(A)	-	-	-	-	-
SPL casing break out LWA2	dB(A)	-	-	-	-	-

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	-	-	-	-	-	-	-	-	-
Outlet	LWA6	-	-	-	-	-	-	-	-	-
Casing	LWA2	-	-	-	-	-	-	-	-	-

RK 125L 104508	
Voltage UN	230 V 1~
Current Imax	0,3
Ambient Temperature tA	55 °C
Medium Temperature tM	55 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	2,2 kg

