

LU




The Zeus fixture can also be externally controlled with a Lumatek digital lighting controller featuring automated dimming, temperature safety control, Sunrise & Sunset Mode for up to 100 fixtures.



HEIGHT TO TEST POINT **15cm**

CANOPY AVERAGE **PPFD**

**1,2m x 1,2m: 716.63  $\mu\text{mol}/\text{m}^2/\text{s}$**

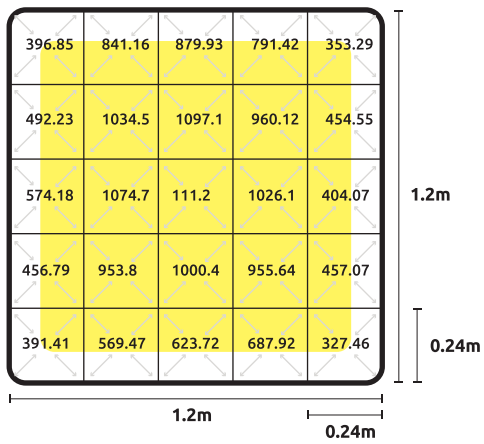

HEIGHT TO TEST POINT **100cm**

CANOPY AVERAGE **PPFD**

**1,2m x 1,2m: 412.26  $\mu\text{mol}/\text{m}^2/\text{s}$**

