


ISOMAX 160 - 430 3 speed

TECHNICAL DATASHEET

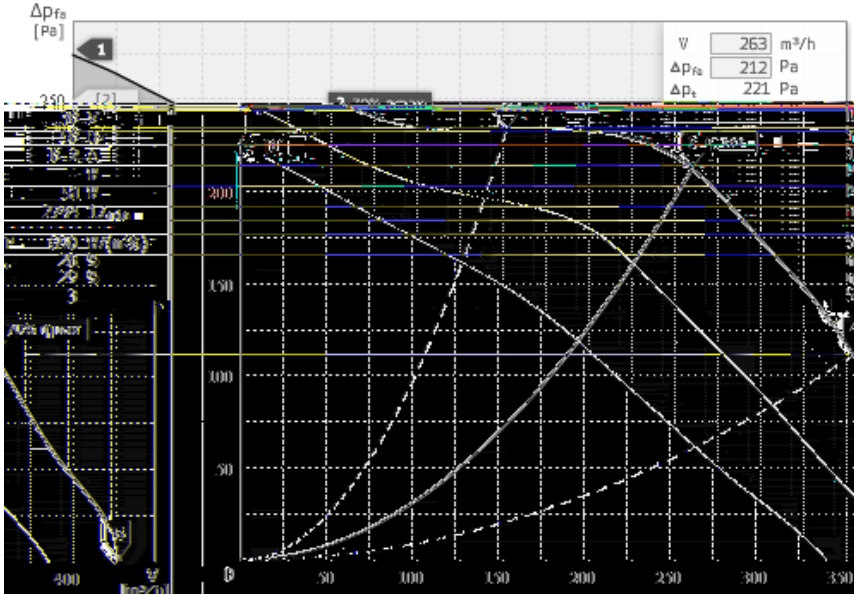

- ETALINE sound insulated
- Galvanized metal housing
- With 3-step switch
- Integrated thermal switch
- With mounting brackets for hanging

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power Consumption P1	W	44	47	50	51	49
RPM n	1/min	2839	2796	2744	2744	2775
SPL inlet LWA5	dB(A)	63	61	61	61	62
SPL outlet LWA6	dB(A)	63	62	60	61	64
SPL casing break out LWA2	dB(A)	50	50	49	51	51

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	60	26	39	51	50	59	48	46	35
Outlet	LWA6	60	27	43	56	54	55	44	41	37
Casing	LWA2	49	26	29	39	44	45	41	37	24

ELIX 160 E2S 01 123413	
Voltage UN	230 V 1~
Current Imax	0,2
Ambient Temperature tA	60 °C
Medium Temperature tM	60 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

